

The ELK is a range of robust exit device trim with key and lever handle for panic/emergency exit doors. ELK's are recessed into the door for higher level resistance against forced entry. The range protects against increasing levels of physical attack, meeting various international standards.

The ELK modular design enables them to operate Surelock McGill Group panic/emergency systems, as well as devices from other manufacturers subject to testing. Please contact our sales team for suitability.



FEATURES

- Recessed into the door for higher level resistance against physical attack
- 8 mm (5/16") square drive shaft
- Fully Stainless steel construction for corrosion resistance and durability
- Engineered using selected composite materials, providing higher levels of attack resistance (ELK-4)
- Tested to over 1,000,000 cycles
- To suit Rim and profile cylinders (order cylinder separately)
- Bolt-through mounting from inside the door

BENEFITS

- Provides external key entry to a panic or emergency exit door
- Certified to a range of international standards (see Product Performance Chart)
- Engineered for longevity and trouble-free service
- Heavy duty design with no visible mounting screws
- Modular design enables use on other manufacturers devices, subject to testing approvals

OPTIONAL ENHANCEMENTS

- Key retained in unlocked position (provides automatic re-locking)
- Monitoring of lock status
- Choice of lever handle type


PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly. Product certification is subject to the chosen lock configuration, for full details please contact the sales office.



SECURITY														SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES						
LPS 1175								LPS 1673 (AR.)					FEBR (min)							EN 1627	STS 202	PAS 24	LPS 2081		
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7																	SR8	
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D												
20 MIN									300 SEC					60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL	
15 MIN									240 SEC						RC5	BR5									
10 MIN	A10	B10	C10	D10					180 SEC					15	RC4	BR4			SRA	EN 179	UL752 Level 1-10		EN 1634-1	GR4	500K
5 MIN									120 SEC						RC3	BR3									
3 MIN									60 SEC					5	RC2	BR2				ASTM F2927 Cat 1	CERTIFIRE	GR3			
1 MIN									30 SEC						RC1	BR1			UL 305	NIJ 0108.01 Level 1-4	BS 476-22	GR2	200K		
																						GR1			


ELK TECHNICAL DRAWINGS

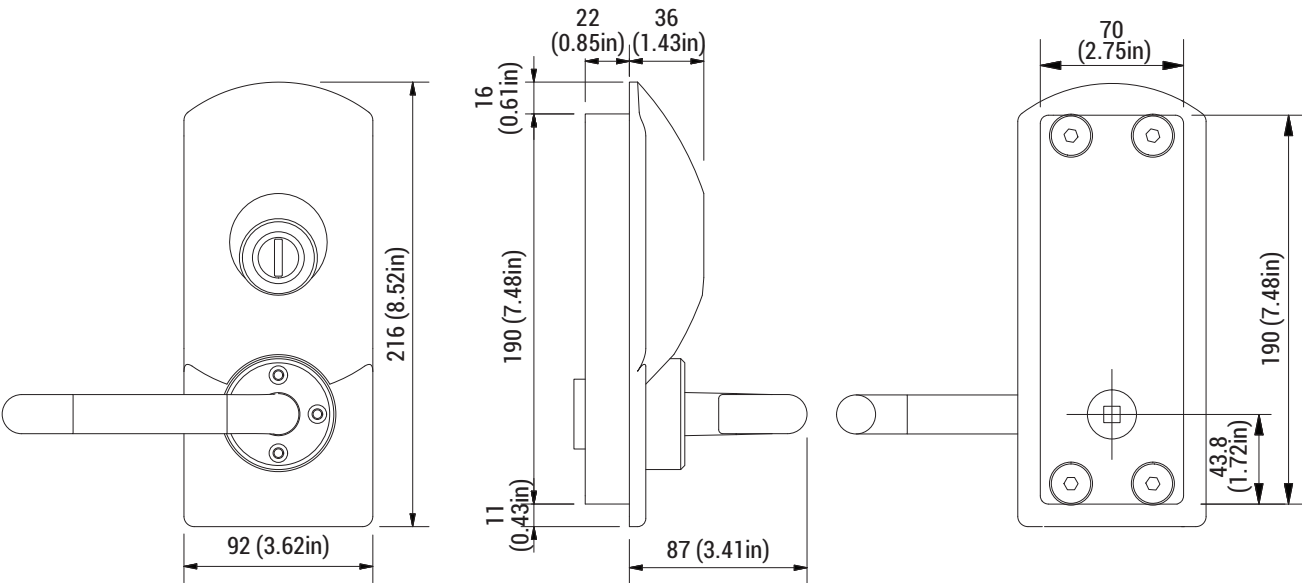

ORDERING CODES

ELK has a structured ordering code that covers the chosen methods of entry, exit and securing, followed by the mounting and orientation codes, additional enhancements can be added to further customise the device..


EXAMPLE ORDER CODE: ELK3-RRALS-RH

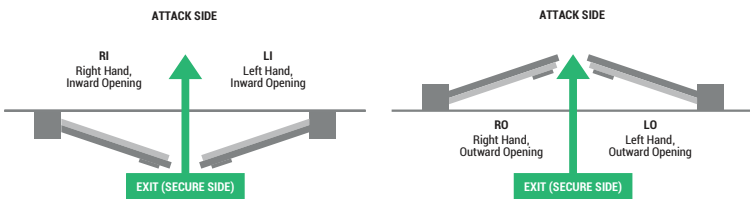

PRODUCT NAME	CYLINDER PROFILE	RE-LOCKING	CYLINDER TYPE	HANDING	OPTIONAL ENHANCEMENTS
ELK-3	RR Round Rim	M Manual	LS Lever handle (Tubular straight)	RH Right hand	M01 Lock monitoring (Microswitch)
ELK-4	SO Scan Oval	A Auto (Key retained)	LE Lever handle (Tubular ergonomic)	LH Left hand	
	EU Euro-profile		US Profile handle (Straight)		
			TR Turnknob handle		

EXAMPLE ENTRY/EXIT DIRECTIONS

See coding chart above for reference



Entry (ELK3-RRALS-RH)

For further ENTRY and EXIT methods & a full range of enhancements please contact our sales office.

The Panic Hasp & Staple is a range of high security exit device trim, providing padlock and handle entry for panic/emergency doors. When secured, the hasp shields the padlock and provides weather protection. With the padlock removed the hasp becomes the entry handle. The range protects against increasing levels of physical attack, meeting various international standards.

The Hasp and Staple modular design operate Surelock McGill Group panic/emergency systems, as well as devices from other manufacturers subject to testing. Please contact our sales team for suitability



HS1



HS2



HS3

FEATURES

- Surface mounted
- Non handed
- 8 mm (5/16") square drive shaft
- Fully Stainless steel construction for corrosion resistance and durability
- Tested to over 1,000,000 cycles
- Compatible with open shackle padlocks from leading manufacturers (order padlocks separately)
- Bolt-through mounting from inside the door

BENEFITS

- Provides external key entry via padlock to a panic or emergency exit door
- Certified to a range of international standards (see Product Performance Chart)
- Engineered for longevity and trouble-free service
- Heavy duty design with no visible mounting screws
- Modular design enables use on other manufacturers devices, subject to testing approvals
- Maximum 14mm (9/16") diameter shackle


PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly. Product certification is subject to the chosen lock configuration, for full details please contact the sales office.




SECURITY														SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES					
LPS 1175								LPS 1673 (AR.)					FEBR (min)							EN 1627	STS 202	PAS 24	LPS 2081	
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7							SR8										
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D	60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL
20 MIN									300 SEC						RC5	BR5			EN 179	UL752 Level 1-10	ASTM F2927 Cat 1	CERTIFIRE	GR4	500K
15 MIN									240 SEC					15	RC4	BR4	SRA	UL 305	NIJ 0108.01 Level 1-4	BS 476-22	GR3	200K		
10 MIN									180 SEC						RC3	BR3		UL 10C	GR5	1 MIL				
5 MIN	A5	B5	C5						120 SEC					5	RC2	BR2	UL 305	NIJ 0108.01 Level 1-4	ASTM F2927 Cat 1	BS 476-22	GR4	500K		
3 MIN									60 SEC						RC1	BR1					GR3	200K		
1 MIN									30 SEC						RC1	BR1					GR2	200K		


HASP & STAPLE TECHNICAL DRAWING

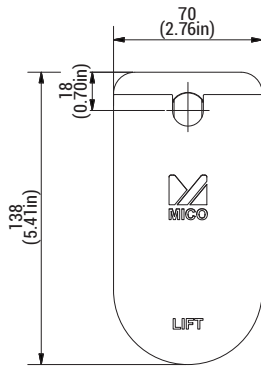


HS1




HS1

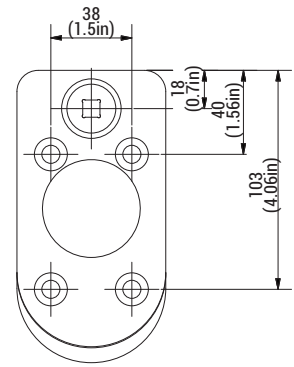


HS1

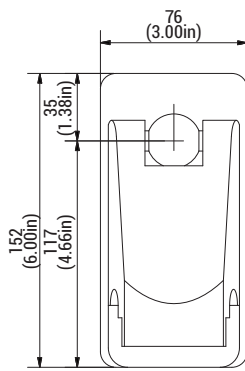

HS2

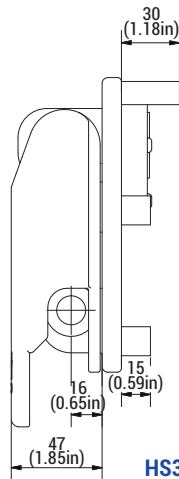

HS3

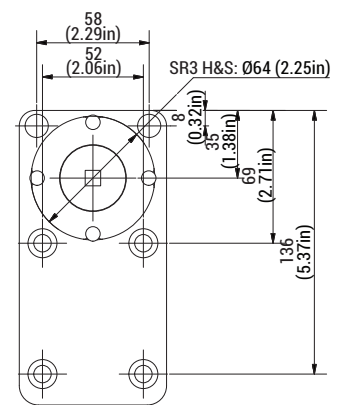

HS3

SELF CODING SYSTEM


The Hasp & Staple range has a structured ordering code that covers the chosen methods of entry, exit and securing, followed by the mounting and orientation codes, additional enhancements can be added to further customise the device.

EXAMPLE ORDER CODE: HS2

HASP & STAPLE	SECURITY RATING		
MODEL	BASE	ENHANCED	HIGH
HS1	•		
HS2		•	
HS3			•

EXAMPLE ENTRY/EXIT DIRECTIONS

See coding chart above for reference



Entry (HS3)

For further ENTRY and EXIT methods & a full range of enhancements please contact our sales office.