

The MICO ELK Lite range of high-quality stainless steel key-driven lockable handle sets are designed to withstand opportunist or professional door entry attacks, and can resist impact attacks, as well as forced rotation, removal or drilling into the key cylinder.

The modular design works with the Surelock McGill Group panic and emergency systems, as well as devices from other manufacturers subject to testing. Please contact our sales team for suitability.



FEATURES

- 8 mm (5/16") square drive shaft
- Fully stainless steel construction for corrosion resistance and durability
- Tested to over 1,000,000 cycles
- Suits Round Rim, Scandinavian Oval, or Euro Profile cylinders
- Bolt-through mounting from the inside of the door

BENEFITS

- Certified to a range of international standards (see Product Performance Chart)
- Engineered for longevity and trouble-free service
- Heavy duty design with no visible mounting screws
- Modular design enables use on other manufacturers devices, subject to testing approvals

OPTIONAL ENHANCEMENTS

- Key retained in unlocked position (provides automatic re-locking)
- Monitoring of lock status


PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly.
Product certification is subject to the chosen lock configuration, for full details please contact the sales office.



SECURITY																SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES				
LPS 1175								LPS 1673 (AR.)					FEBR (min)	EN 1627	STS 202							PAS 24	LPS 2081		
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7																	SR8	
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D												
20 MIN									300 SEC					60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL	
15 MIN									240 SEC						RC5	BR5									
10 MIN									180 SEC					15	RC4	BR4									
5 MIN									120 SEC						RC3	BR3	SRA	EN 179	UL752 Level 1-10	ASTM F2927 Cat 1	CERTIFIRE	GR3	500K		
3 MIN	A3	B3							60 SEC					5	RC2	BR2									
1 MIN									30 SEC						RC1	BR1					UL 305	NIJ 0108.01 Level 1-4	BS 476-22	GR2	200K
																						GR1			


ELK TECHNICAL DRAWINGS

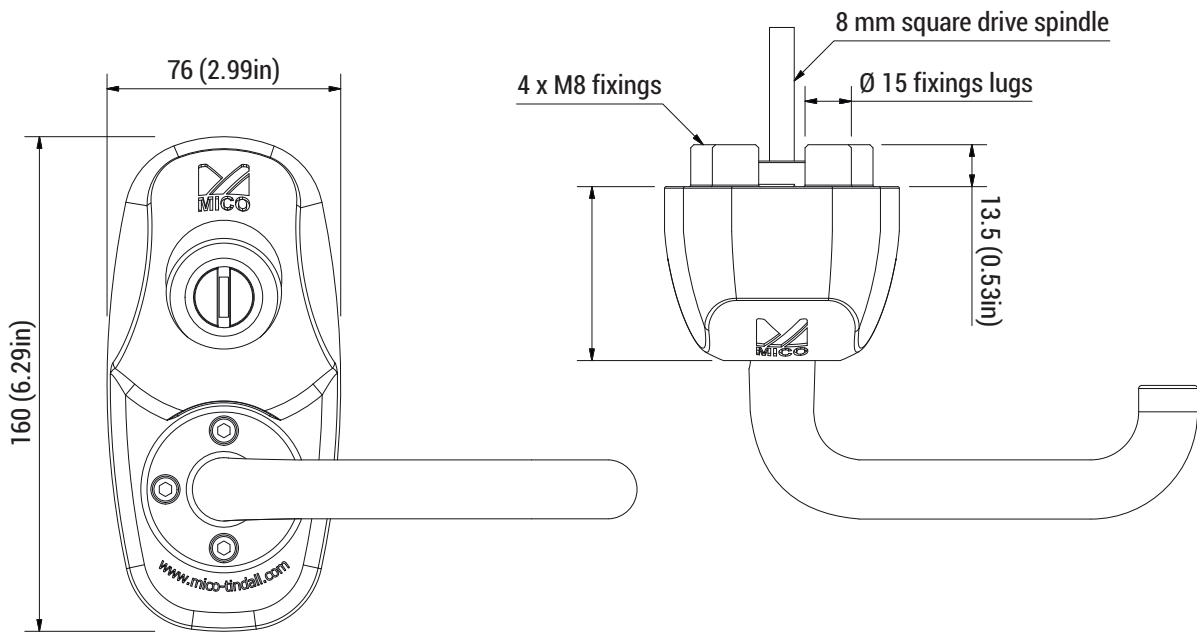

ORDERING CODES

ELK has a structured ordering code that covers the chosen methods of entry, exit and securing, followed by the mounting and orientation codes, additional enhancements can be added to further customise the device.


EXAMPLE ORDER CODE: ELK3-RRALS-RH

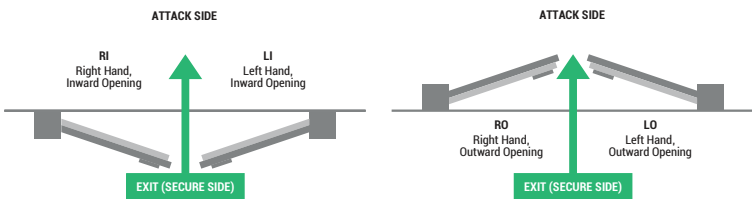

PRODUCT NAME		CYLINDER PROFILE		RE-LOCKING		OPERATOR TYPE		HANDING		OPTIONAL ENHANCEMENTS	
ELK-3		RR	Round Rim	M	Manual	LS	Lever handle (Tubular straight)	RH	Right hand	M01	Lock monitoring (Microswitch)
ELK-4		SO	Scan Oval	A	Auto (Key retained)	LE	Lever handle (Tubular ergonomic)	LH	Left hand		
		EU	Euro-profile			TR	Turnknob handle				

EXAMPLE ENTRY/EXIT DIRECTIONS

See coding chart above for reference



Entry (ELK3-RRALS-RH)

For further ENTRY and EXIT methods & a full range of enhancements please contact our sales office.