HASP & STAPLE

The Panic Hasp & Staple is a range of high security exit device trim, providing padlock and handle entry for panic/emergency doors. When secured, the hasp shields the padlock and provides weather protection. With the padlock removed the hasp becomes the entry handle. The range protects against increasing levels of physical attack, meeting various international standards.

The Hasp and Staple modular design operate Surelock McGill Group panic/emergency systems, as well as devices from other manufacturers subject to testing. Please contact our sales team for suitability



HS1

FEATURES

- Surface mounted
- Non handed
- 8 mm (5/16") square drive shaft
- Fully Stainless steel construction for corrosion resistance and durability
- Tested to over 1,000,000 cycles
- Compatible with open shackle padlocks from leading manufacturers (order padlocks separately)
- Bolt-through mounting from inside the door



HS2

BENEFITS

- Provides external key entry via padlock to a panic or emergency exit door
- Certified to a range of international standards (see Product Performance Chart)
- Engineered for longevity and trouble-free service
- Heavy duty design with no visible mounting screws
- Modular design enables use on other manufacturers devices, subject to testing approvals
- Maximum 14mm (9/16") diameter shackle



HS3


PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly.
Product certification is subject to the chosen lock configuration, for full details please contact the sales office.


Secured by Design
SBD
Police Preferred Specification

SECURITY																								
LPS 1175									LPS 1673 (AR.)					FEBR (min)	EN 1627	STS 202	PAS 24	LPS 2081	SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7	SR8																
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D											
20 MIN									300 SEC					60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL
15 MIN									240 SEC						RC5	BR5								
10 MIN									180 SEC					15	RC4	BR4			EN 179	UL752 Level 1-10		EN 1634-1	GR4	500K
5 MIN	A5	B5	C5						120 SEC						RC3	BR3		SRA			ASTM F2927 Cat 1	CERTIFIRE	GR3	
3 MIN									60 SEC					5	RC2	BR2			UL 305	NIJ 0108.01 Level 1-4		BS 476-22	GR2	200K
1 MIN									30 SEC						RC1	BR1							GR1	


HASP & STAPLE TECHNICAL DRAWING

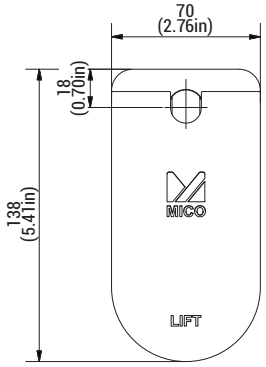


HS1




HS1

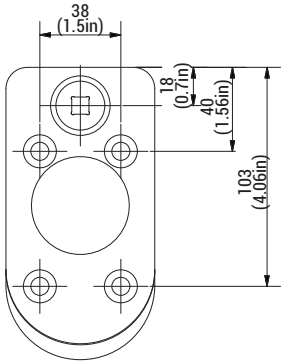


HS1

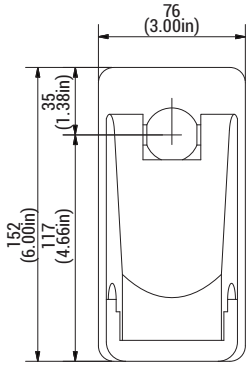

HS2

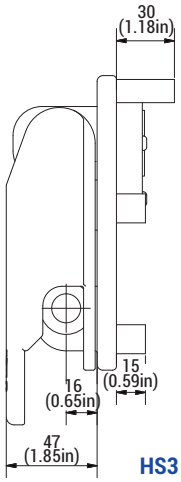

HS3

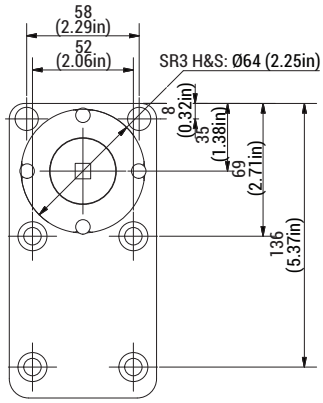

HS3


SELF CODING SYSTEM

The Hasp & Staple range has a structured ordering code that covers the chosen methods of entry, exit and securing, followed by the mounting and orientation codes, additional enhancements can be added to further customise the device.

EXAMPLE ORDER CODE: HS2

HASP & STAPLE	SECURITY RATING		
MODEL	BASE	ENHANCED	HIGH
HS1	●		
HS2		●	
HS3			●

EXAMPLE ENTRY/EXIT DIRECTIONS *See coding chart above for reference*



Entry (HS3)

For further ENTRY and EXIT methods & a full range of enhancements please contact our sales office.