

The LEO range is an aesthetic and rugged exit device trim with key and lever handle for panic/emergency exit doors. LEO's are well proven in extremely challenging environments and available as surface mounted or recessed for higher level resistance against forced entry. The range also protects against increasing levels of physical attack.

The LEO modular design enables them to operate Surelock McGill panic/emergency systems, as well as devices from other manufacturers subject to testing. Please contact our sales team for suitability.




SURFACE LEO

FEATURES

- Surface, or recessed into the door for higher security
- 8 mm (5/16") or 9.5 mm (3/8") square drive shaft
- 316 grade stainless steel construction for hostile environments and durability
- Tested to over 1,000,000 cycles
- To suit morticed (Screw-In) or Profile cylinder (order cylinder separately)
- Bolt-through mounting from inside the door
- Compatible with most Surelock Panic & Emergency Escape systems and maintaining the CE mark under BS EN 179, BS EN 1125

BENEFITS

- Provides external key entry to a panic or emergency exit door
- Certified to a range of international standards (see Product Performance Chart)
- Engineered for longevity and trouble-free service
- Heavy duty design with no visible mounting screws
- Modular design enables use on other manufacturers devices, subject to testing approvals

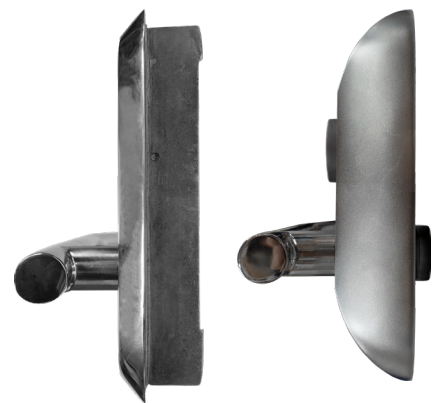

RECESSED LEO

SURFACE LEO

OPTIONAL ENHANCEMENTS


- Key retained in unlocked position (provides automatic re-locking)
- Monitoring of lock status
- Cylinder protection guard with anti-drilling plate

PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly. Product certification is subject to the chosen lock configuration, for full details please contact the sales office.

SECURITY																	SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES				
LPS 1175									LPS 1673 (AR.)					FEBR (min)	EN 1627	STS 202							PAS 24	LPS 2081		
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7	SR8																		
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D													
20 MIN									300 SEC						60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL	
15 MIN									240 SEC							RC5	BR5							EN 1634-1		
10 MIN									180 SEC						15	RC4	BR4					EN 179	UL752 Level 1-10		GR4	500K
5 MIN									120 SEC							RC3	BR3								GR3	
3 MIN	A3	B3							60 SEC						5	RC2	BR2	SRA	UL 305	NIJ 0108.01 Level 1-4	ASTM F2927 Cat 1	CERTIFIRE	GR2	200K		
1 MIN									30 SEC							RC1	BR1							BS 476-22	GR1	

LEO TECHNICAL DRAWINGS

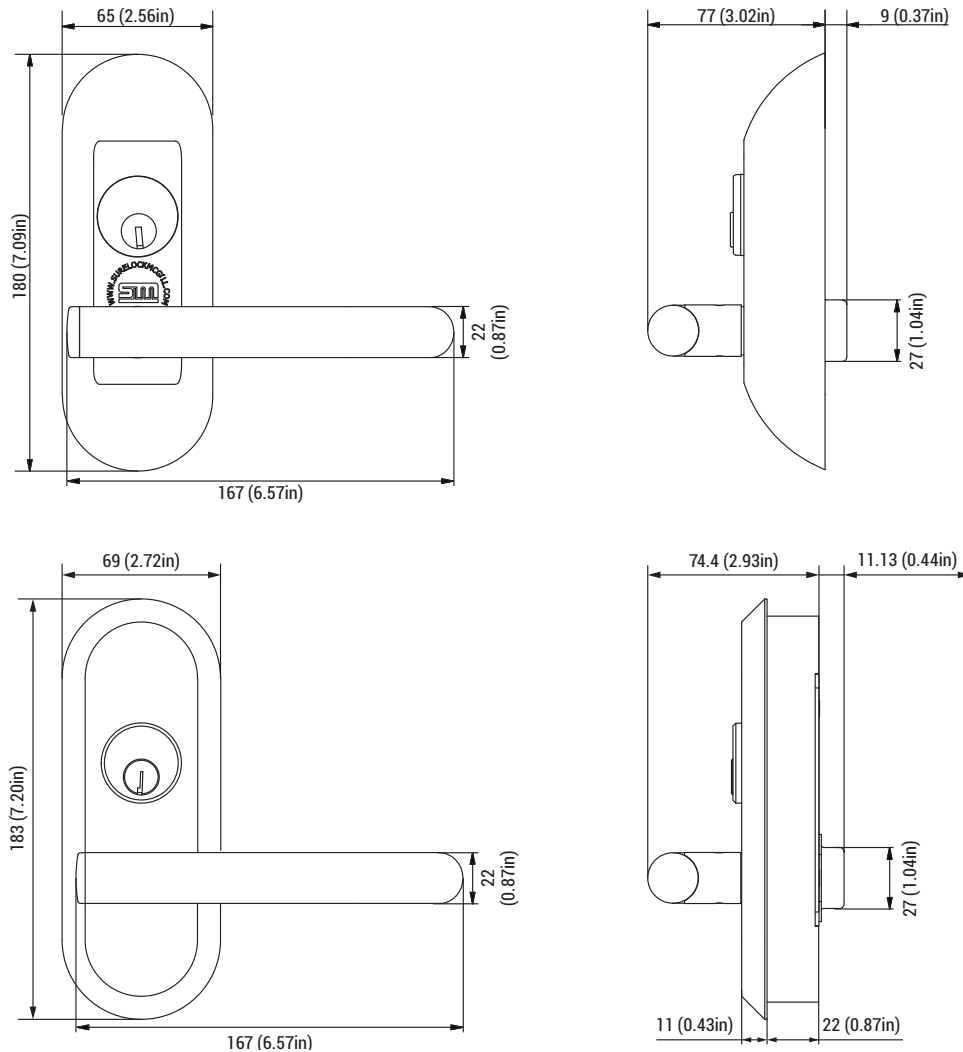


ORDERING CODES

LEO lockable handles have a simple ordering code that covers the chosen mounting method, cylinder profile, cylinder protection and handing configuration.


EXAMPLE ORDER CODE:

- S-8718 Surface LEO , Screw in Rim cylinder (option L)
- S-8719 Recessed LEO, Screw in Rim cylinder (option L1)
- S-11330 Surface LEO, Euro-profile cylinder (option L3)
- S-11335 Recessed LEO, Euro-profile cylinder (option L4)

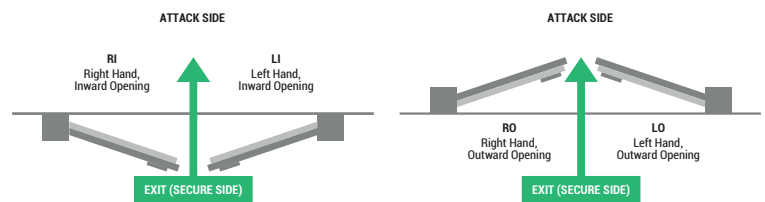

EXAMPLE ENTRY/EXIT DIRECTIONS

See coding chart above for reference

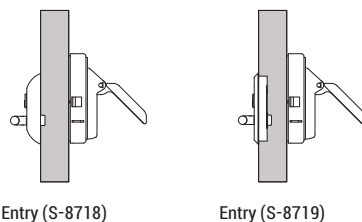

For further ENTRY and EXIT methods & a full range of enhancements please contact our sales office.