

EVOLUTION OF THE SLIMLINE TWINLOCK

TWINLOCK CLASSIC

1. Product paint finish is Grey White (RAL9002)
2. Centre lock module with solenoid bulge
3. Panic escape version available with green panic plate to meet BSEN1125
4. Emergency escape version available with green push pad to meet BSEN179
5. Emergency escape version available with green lever handle to meet BSEN179
6. Access control solenoid/motorised/monitored locks have 5m cables hard wired into the top and/or bottom locks as applicable
7. No facility for bolt through lock fixings for the new 'G' type cylinder guards



Fixing foot print

Drawing reference 14652.01.000


Lock body length 389mm, lock body depth 94mm, lock body thickness 27mm

Cable outlet positions – Drawing reference 14652.01.000

Lock & Bolt status monitoring with access control model requires option M for bolt status monitoring and option N for lock status monitoring – this applies to either/or the top and bottom locks

3/8" Spindle/shaft

'G' type cylinder guard, preparation hole increases from 57mm to 63mm dia. hole – Drawing reference 14652.03.000

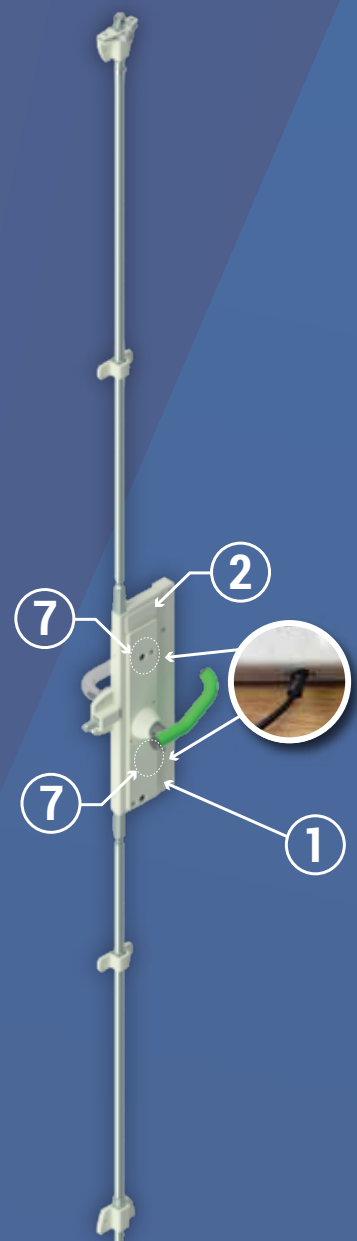

SLIMLINE TWINLOCK 1ST DECEMBER 2017

1. Product paint finish is Aluminium White (RAL9006)
2. No solenoid bulge
3. Stainless steel cast bolt guides for improved strength
4. Panic escape version available with SAA panic plate as standard or stainless steel round bar both meeting BSEN1125
5. Emergency escape version available with SAA push pad to meet BSEN179
6. Emergency escape version available with stainless steel emergency escape lever handle to meet BSEN179
7. Plug in electrical connector for access control solenoid/motorised and/or monitoring facility for both locks if applicable – this applies to either/or the top and bottom locks (cable length 5m)
8. Facility for bolt through lock fixings for the new 'G' type cylinder guards available
9. New fixing positions for new 4 fixings stainless steel lever handle
10. 5mm load plate available for cost effective and speedy preparation
11. Bolt enhancement packs for greater security and blast resistance – 15mm and 25mm bolts available



Lock body length 434mm, lock body depth 94mm, lock body thickness 22mm

Can be mortice fitted with slimmer 22mm body or 26mm when installed within a steel mortice cassette


Cable outlet positions are different – Drawing reference 14652.01.000

Lock & Bolt status monitoring is standard with access control version (no additional code required for monitoring)

Lock & bolt status monitoring for mechanical lock versions requires Option M
Improved spring design reducing release force, yet stronger and smoother
8mm spindle/shaft

'G' type cylinder guard, preparation hole increases from 57mm to 63mm dia. hole – Drawing reference 14652.03.000

In house cycle testing to over 4 million cycles

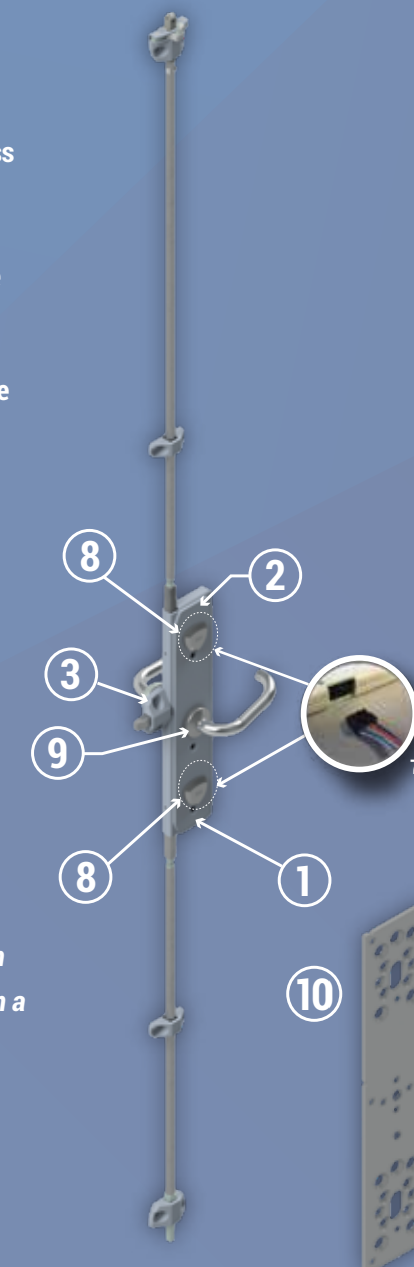

11 15mm bolt enhancement guide

25mm bolt enhancement guide

