

High performance multi-point life safety panic exit system from both sides of a door, automatically re-securing upon door closure. The system secures with a singular vertical bolt at the top and bottom of the door.

A choice of exit releases includes panic bar, push pad or lever handle emergency egress, meeting a wide range of international accreditations. Manufactured in 316 stainless steel for hostile environments and durability.

FEATURES

- Panic bar release on both sides of the door
- Surface mounting
- Infinite 'iRestraint' restrains bolts throughout their opening travel
- 2-point bolting positions
- 15mm (5/8") bolts x 25mm (1") throw
- 316 grade stainless steel construction for hostile environments and durability
- Proven rack & pinion driven
- Cycle tested to over 1,000,000 cycles

BENEFITS

- Dual directional life safety panic escape
- Auto-bolting upon door closure
- Certified to a range of international standards (see Product Performance Chart)
- Engineered for longevity and trouble-free service

OPTIONAL ENHANCEMENTS

- Monitoring of bolt status
- Selection of bi-directional keeps available
- Further enhancements are available



INTERNAL VIEW




EXTERNAL VIEW

PRODUCT PERFORMANCE CHART


☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly. Product certification is subject to the chosen lock configuration, for full details please contact the sales office.




SECURITY															SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES					
LPS 1175									LPS 1673 (AR.)					FEBR (min)							EN 1627	STS 202	PAS 24	LPS 2081	
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7	SR8																	
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D												
20 MIN									300 SEC					60	RC6	BR6	PAS 24	SRB	EN 1125	EN 1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL	
15 MIN									240 SEC						RC5	BR5			EN 179	UL 752 Level 1-10	ASTM F2927 Cat 1	EN 1634-1	GR4	500K	
10 MIN									180 SEC					15	RC4	BR4			UL 305	NIJ 0108.01 Level 1-4			Certifire	GR3	200K
5 MIN									120 SEC						RC3	BR3			BS 476-22	GR2					
3 MIN									60 SEC					5	RC2	BR2					GR1				
1 MIN									30 SEC						RC1	BR1									

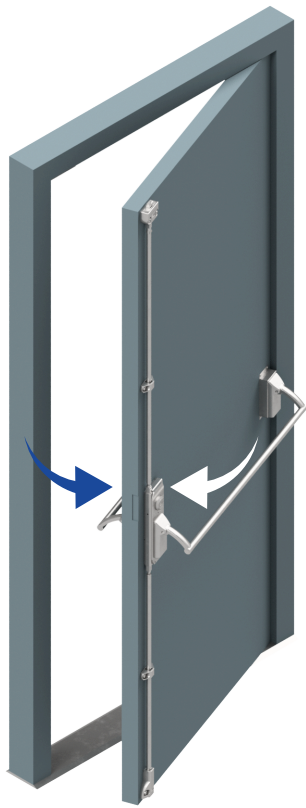


OPENING INWARD




OPENING OUTWARD

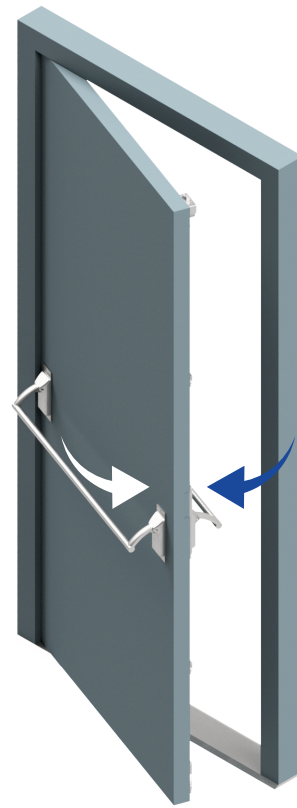


IRESTRAINT TOP

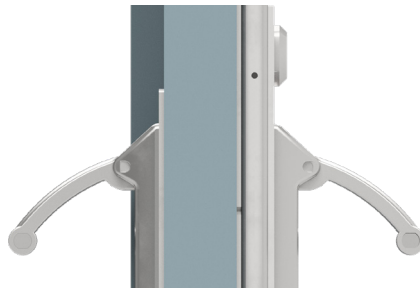

CENTER MODULE
(TUBULAR BAR FOR ESCAPE BOTH SIDES)




BOTTOM BOLT ARRANGEMENT

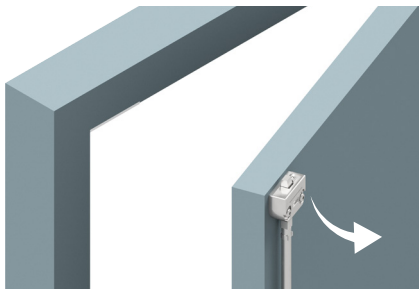

IRESTRAINT (OPENING INWARD)



IRESTRAINT (CLOSED)

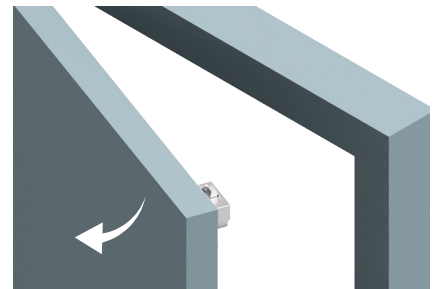

IRESTRAINT (OPENING OUTWARD)

Intellectual Property Rights

All Surelock products are the subject to intellectual property rights. These include pending and approved patent and design rights, in particular to the Slimline: EP2311/2115252, US8616591, GB2213884.6 & US12559984. In accordance with our policy of continual development and improvement we reserve the right to make changes in design and specifications without notice.