

The Loddon is a heavy duty rim deadlock with external key entry and single operation egress for inward opening doors. Through-bolt mounting of the lock body, passing through the door into the external cylinder housing, provides for maximum strength and security.

Compatible with key cylinders from all leading manufacturers. Ideal for new doors, or as a security upgrade to existing doors and includes keeps. The robust design and stainless steel construction of Loddon will assist in protecting your facility and provide durability.



FEATURES

- Surface mounted for maximum strength
- Automatic securement upon door closure
- 25mm (1") x 11mm (3/8") bolt x 25mm (1") throw
- Retrofit/Security upgrade of Ingersoll rim locks, includes stainless steel escutcheon plate to cover previous lock mountings
- 316 grade stainless steel construction for hostile environments and durability
- Cycle tested to over 1,000,000 cycles
- To suit rim cylinders (order cylinder separately)

BENEFITS

- Door automatically secured in closed position
- Certified to a range of international standards (see Product Performance Chart)
- Engineered for longevity and trouble-free service
- Popular retrofit, to upgrade existing doors

OPTIONAL ENHANCEMENTS

- Ingersoll cylinder profile housing & protector (accepts KIK type cylinder from leading manufacturers)
- Bolt dogging (manual hold-back facility)
- External lockdown facility
- Cylinder guard protection available from our tested and accredited range


PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly. Product certification is subject to the chosen lock configuration, for full details please contact the sales office.



SECURITY															SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES				
LPS 1175								LPS 1673 (AR.)					FEBR (min)	EN 1627							STS 202	PAS 24	LPS 2081	
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7																	SR8
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D											
20 MIN									300 SEC					60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL
15 MIN									240 SEC						RC5	BR5								
10 MIN									180 SEC					15	RC4	BR4			EN 179	UL752 Level 1-10		EN 1634-1	GR4	500K
5 MIN									120 SEC						RC3	BR3								
3 MIN	A3	B3							60 SEC					5	RC2	BR2	SRA			ASTM F2927 Cat 1	CERTIFIRE	GR3		
1 MIN									30 SEC						RC1	BR1		UL 305	NIJ 0108.01 Level 1-4		BS 476-22	GR2	200K	
																					GR1			


LODDON TECHNICAL DRAWING

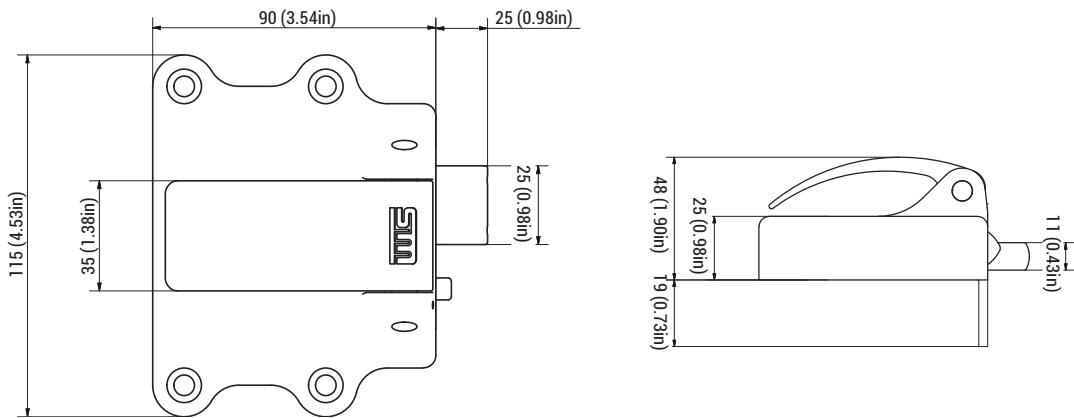

SELF CODING SYSTEM

The Loddon (LO) has a simple ordering code that covers the chosen methods of entry and exit, followed by the mounting and orientation codes, additional enhancements can be added to further customise the device.


EXAMPLE ORDER CODE: LO1A-KMKK-AA-LMPL

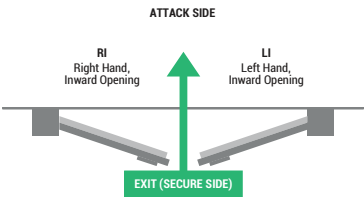

PRODUCT			ENTRY		SECURING		EXIT	
RANGE		BOLTS	UNLOCKING		UPON DOOR CLOSURE		UNLOCKING	
LO	Loddon	1	K	Key	AA	Auto bolting / Auto deadlocking	L	Single Handed / Panic - Emergency
BOLT DIRECTION		BOLT RETRACTION				BOLT RETRACTION		
A	Horizontal bolt	M	Manual			M	Manual	
		OPERATOR				OPERATOR		
		KK	Key	PL	Pull lever			

EXAMPLE ENTRY/EXIT DIRECTIONS

See coding chart above for reference



Entry (KMKK)
Exit (LMPL)

For further ENTRY and EXIT methods & a full range of enhancements please contact our sales office.