

The OTAC-100 is a unique low profile discrete complete battery powered access control solution. Through input of the correct pin code, RFID card, or mobile authorisation, the 19mm stainless steel deadbolt can be retracted allowing the door or hatch to open. Mechanical key override of lock provided as standard. An internal pull lever retracts the bolt allowing for single handed escape from the inside of the door. Anti-tamper features with cast aluminium and stainless steel construction ensures longevity.

The combination of Surelock McGill mechanical mechanisms combined with standalone smart lock technology by Codelocks have come together to combine smart technology with traditional access control features.




FEATURES

- Access control releases deadlock allowing slide bolt to be retracted
- Access control can be managed by electromechanical pin pad, RFID swipe card, or mobile code software including one time access code
- Predominantly stainless steel and aluminium construction
- 19mm stainless steel slide bolt
- Mechanical key override as standard
- Battery powered, no cables required
- Internal pull lever for single handed escape

BENEFITS

- Full range of optional access control features.
- Battery powered – no wiring required
- Discrete, secure and tamper proof design
- Great for external doorsets
- Long lasting construction with quality materials

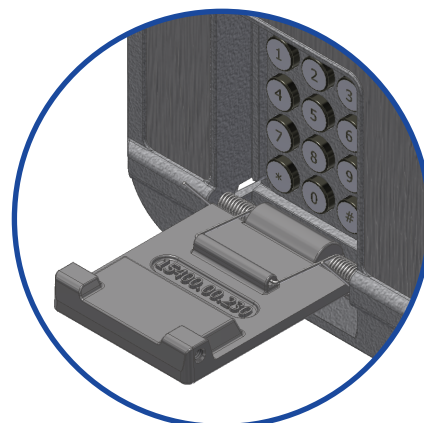

INTERNAL KEY PAD VIEW


PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly. Product certification is subject to the chosen lock configuration, for full details please contact the sales office.



SECURITY																SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES			
LPS 1175								LPS 1673 (AR.)					FEBR (min)	EN 1627	STS 202							PAS 24	LPS 2081	
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7																	SR8
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D											
20 MIN									300 SEC					60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL
15 MIN									240 SEC						RC5	BR5			EN 179	UL752 Level 1-10		EN 1634-1		
10 MIN									180 SEC					15	RC4	BR4							GR3	
5 MIN									120 SEC						RC3	BR3	SRA	UL 305	NIJ 0108.01 Level 1-4	ASTM F2927 Cat 1	CERTIFIRE	GR2	200K	
3 MIN									60 SEC					5	RC2	BR2					BS 476-22	GR1		
1 MIN									30 SEC						RC1	BR1								

OTAC-100 TECHNICAL DRAWING

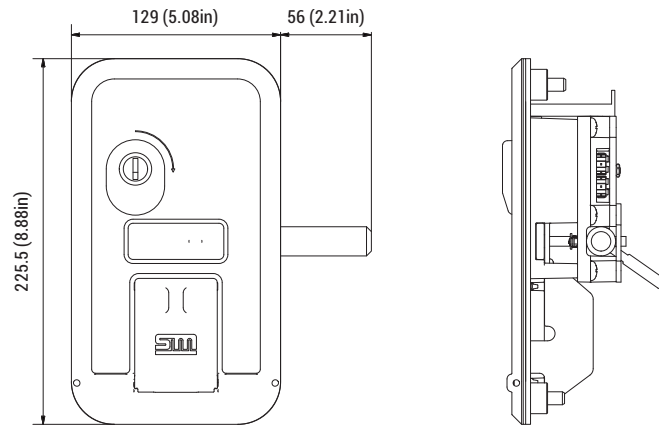

SELF CODING SYSTEM

The OTAC-100 (OT) has a simple ordering code that covers the chosen methods of entry and exit, followed by the mounting and orientation codes, additional enhancements can be added to further customise the device.

EXAMPLE ORDER CODE: OTAC-100