


The Ribble is an anti-tamper cabinet lock, providing a high level of protection against surreptitious breach. Dual mounting footprint provides for retrofit of UK and International combination locks.

Accommodates selected profile cylinders from a choice of major manufacturers. Cylinders are keyed to a unique differ and each with two keys. A choice of cylinder protection guards are available to suit cabinet dimensions and cylinder projection.

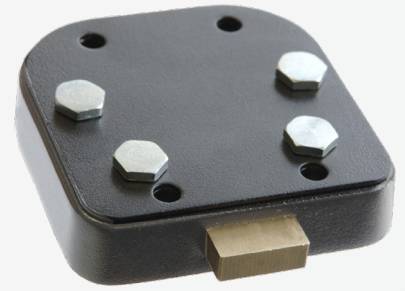

FEATURES

- Surface mounted for maximum strength
- Dual UK & International combination lock retrofit mounting
- 25mm (1") x 9mm (3/8") bolt x 10mm (3/8") throw
- Tested to over 1,000,000 cycles
- To suit profile cylinder (order cylinder separately)

BENEFITS

- Key retained in unlocked position
- Engineered for longevity and trouble-free service
- Popular retrofit, replacing existing combination locks

OPTIONAL ENHANCEMENTS


- Choice of cylinder projection guards
- Double sided key/key or key/thumbturn cylinders available (order separately)
- Deadlock status monitoring

PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly.
Product certification is subject to the chosen lock configuration, for full details please contact the sales office.

SECURITY															SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES				
LPS 1175								LPS 1673 (AR.)					FEBR (min)	EN 1627							STS 202	PAS 24	LPS 2081	
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7																	SR8
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D											
20 MIN									300 SEC					60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL
15 MIN									240 SEC						RC5	BR5								
10 MIN									180 SEC					15	RC4	BR4	PAS 24	SRA	EN 179	UL752 Level 1-10		EN 1634-1	GR4	500K
5 MIN									120 SEC						RC3	BR3								GR3
3 MIN									60 SEC					5	RC2	BR2	PAS 24	SRA			ASTM F2927 Cat 1	CERTIFIRE	GR2	200K
1 MIN									30 SEC						RC1	BR1					UL 305	NIJ 0108.01 Level 1-4	BS 476-22	

RIBBLE TECHNICAL DRAWING

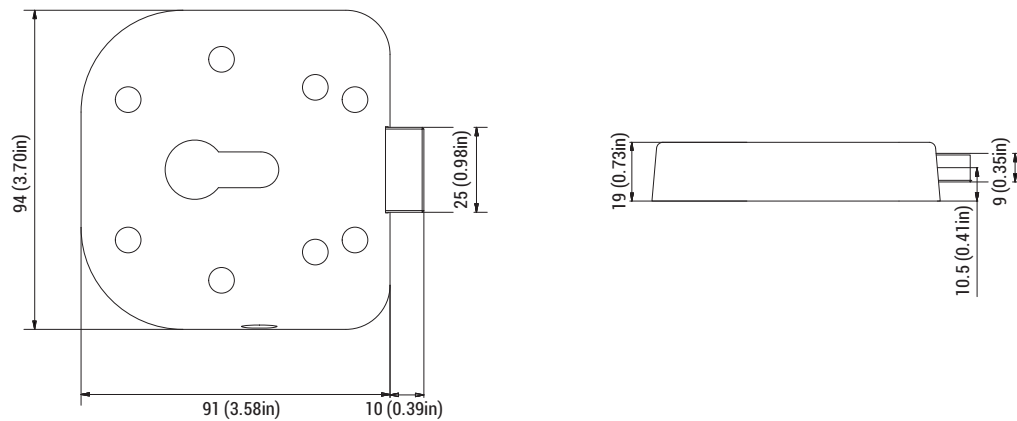

SELF CODING SYSTEM

The Ribble (RL) has a simple ordering code that covers the chosen methods of entry and exit, followed by the mounting and orientation codes, additional enhancements can be added to further customise the device.

EXAMPLE ORDER CODE: RB1A-KMKK-MM-XXXX

PRODUCT			ENTRY			SECURING		EXIT		
RANGE		BOLTS	UNLOCKING			UPON DOOR CLOSURE		UNLOCKING		
RB	Ribble	1	K	Key		MM	Manual bolting / Manual deadlocking		X	None
BOLT DIRECTION		BOLT RETRACTION						K	Key	
A	Horizontal bolt		M	Manual				T	Thumbturn	
		OPERATOR						BOLT RETRACTION		
		KK	Key					X	None	
								M	Manual	
								OPERATOR		
								XX	None	
								KK	Key	
								TN	Thumbturn	

EXAMPLE BOLT DIRECTIONS


See coding chart above for reference



No Bolts (1)
Direction (A)

EXAMPLE ENTRY/EXIT DIRECTIONS

See coding chart above for reference



Entry (KMKK)
Exit (XXXX)

For further ENTRY and EXIT methods & a full range of enhancements please contact our sales office.