


The Surelock McGill Cylinder Guard range has been developed and continuously improved to provide protection against multiple threats, including manipulation, bumping, physical attack, ballistic, blast and fire. Successfully tested and certified to many international standards, the range includes cylinder guards to suit both surface mounted and mortice fitted locking systems.

The Cylinder Guard range can accommodate Round Rim, Scandinavian Oval, and Euro Profile cylinders. A well proven modular mounting footprint, together with a balance of unique materials enables the correct level of security protection to be selected.

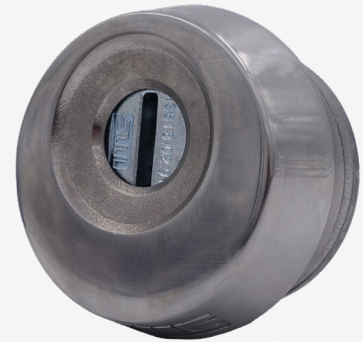

GSS2/3 TO SUIT SURFACE MOUNTED LOCKING SYSTEMS

FEATURES

- Surface or mortice lock fitting applications
- Certified to LPS 1175 as part of a complete doorset
- Also achieved security testing under LPS 1673, LPS 2081, EN 1627, PAS 24 and FEBR
- Tested to ballistic standards under BS EN 1522/1523, UL 752 and FEBR
- Grade 5 corrosion resistance for building hardware
- Fixings can be bolted through most Surelock McGill locking systems
- Suits Round Rim, Scandinavian Oval, or Euro Profile cylinders

BENEFITS

- Protects cylinder from attempts of forced removal and manipulation
- Engineered for longevity and trouble-free service
- Heavy duty design with no visible fixings
- Multitude of fitting methods for ease of installation

PRODUCT PERFORMANCE CHART

☐ Indicates product has been certified, or tested & approved as part of a complete doorset assembly. Product certification is subject to the chosen lock configuration, for full details please contact the sales office.




SECURITY															SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES				
LPS 1175								LPS 1673 (AR.)					FEBR (min)	EN 1627							STS 202	PAS 24	LPS 2081	
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7																	SR8
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D											
20 MIN									300 SEC	A300E	B300E	C300E	D300E	60	RC6	BR6	PAS 24	SRB	EN 1125	EN1522 FB7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL
15 MIN									240 SEC							RC5			BR5					
10 MIN	A10	B10	C10	D10	E10				180 SEC					15	RC4	BR4			EN 179	UL752 Level 1-10	ASTM F2927 Cat 1	EN 1634-1	GR4	500K
5 MIN						F5	G5		120 SEC							RC3		BR3						
3 MIN									60 SEC					5	RC2	BR2			SRA	UL 305	NIJ 0108.01 Level 2 & 3	CERTIFIRE	GR2	200K
1 MIN									30 SEC							RC1	BR1				BS 476-22		GR1	

SURFACE VS MORTICE FITTED CYLINDER GUARD SOLUTIONS

Cylinder Guards To Suit Surface Mounted Locking Systems (GSS)


- Provides deep recess into door leaf for added security
- Compatible with most Surelock McGill surface mounted locking systems
- Suits Round Rim, Abloy Rim, Scandinavian Oval, or Euro Profile cylinders

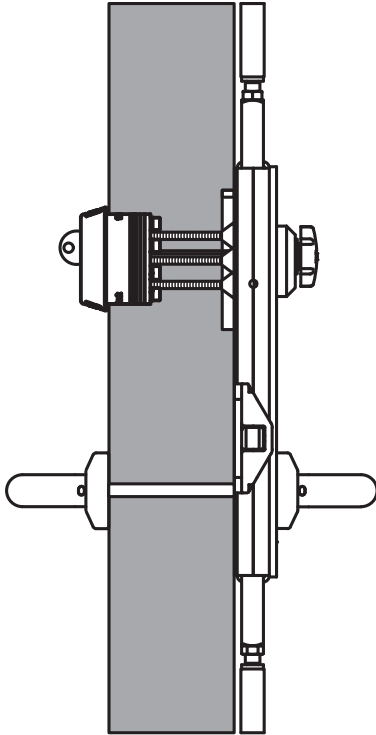


**SURFACE MOUNTED LOCKING
SYSTEM WITH FIXING PLATE**

Cylinder Guards To Suit Mortice Fitted Locking Systems (GMS)


- Provides shallow recess into door leaf to allow clearance for mortice deadlock
- Compatible with most Surelock McGill mortice fitted locking systems
- Suits Euro Profile cylinders

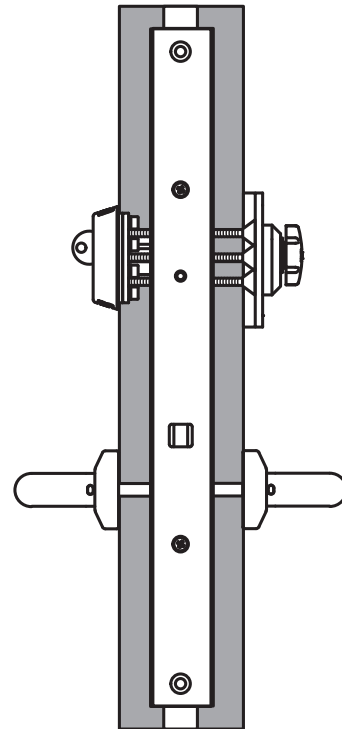

**MORTICE FITTED LOCKING
SYSTEM WITH FIXING PLATE**

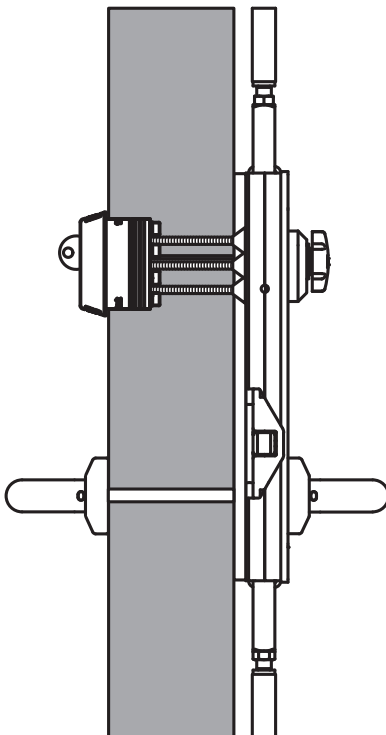

**SURFACE MOUNTED LOCKING
SYSTEM WITH B08 LOAD PLATE**

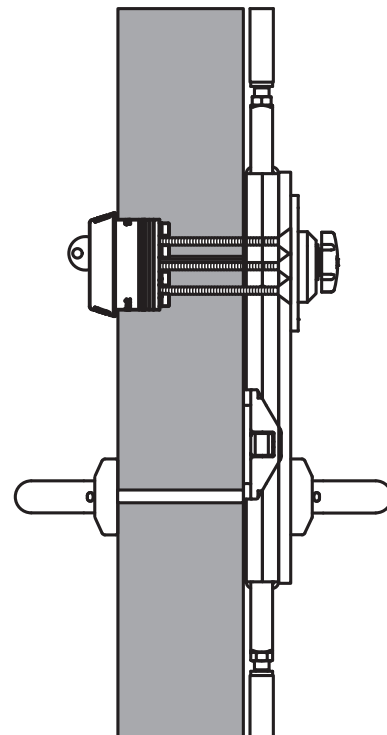

**SURFACE MOUNTED LOCKING SYSTEM
WITH W14 BOLT THROUGH PLATE**

CYLINDER GUARDS TO SUIT SURFACE MOUNTED LOCKING SYSTEMS SELECTION CHART - LPS 1175

- ☐ - Indicates product has been certified, or tested & approved as part of a complete doorset assembly.
- - Indicates product has passed testing at this attack rating and higher.

GSS2/3



LPCB LPS 1175									
TIME	ISSUE 8							ISSUE 7	
	TOOLS							SR 1-6	
	A	B	C	D	E	F	G		
20 MIN								SR6	
15 MIN								SR5	
10 MIN	GS-LA10	GS-LB10						SR4	
5 MIN	GS-LA05	GS-LB05	GS-LC05					SR3	GS-LSR3
3 MIN	GS-LA03	GS-LB03	GS-LC03					SR2	GS-LSR2
1 MIN	GS-LA01	GS-LB01	GS-LC01	GS-LD01	GS-LE01	GS-LF01	GS-LG01	SR1	

GSS4



	A	B	C	D	E	F	G		SR 1-6
20 MIN								SR6	
15 MIN								SR5	
10 MIN			GS-LC10	GS-LD10				SR4	GS-LSR4
5 MIN				GS-LD05				SR3	
3 MIN				GS-LD03				SR2	
1 MIN								SR1	

GSS5



	A	B	C	D	E	F	G		SR 1-6
20 MIN								SR6	
15 MIN								SR5	GS-LSR5
10 MIN					GS-LE10			SR4	
5 MIN					GS-LE05			SR3	
3 MIN					GS-LE03			SR2	
1 MIN								SR1	

GSS7



	A	B	C	D	E	F	G		SR 1-6
20 MIN								SR6	
15 MIN								SR5	
10 MIN								SR4	
5 MIN						GS-LF05	GS-LG05	SR3	
3 MIN						GS-LF03	GS-LG03	SR2	
1 MIN								SR1	

CYLINDER GUARDS TO SUIT MORTICE FITTED LOCKING SYSTEMS SELECTION CHART - LPS 1175

GMS2/3



	A	B	C	D	E	F	G		SR 1-6
20 MIN								SR6	
15 MIN								SR5	
10 MIN	GM-LA10	GM-LB10						SR4	
5 MIN	GM-LA05	GM-LB05	GM-LC05					SR3	GM-LSR3
3 MIN	GM-LA03	GM-LB03	GM-LC03					SR2	GM-LSR2
1 MIN	GM-LA01	GM-LB01	GM-LC01					SR1	


GMS4




	A	B	C	D	E	F	G		SR 1-6
20 MIN								SR6	
15 MIN								SR5	
10 MIN			GM-LC10	GM-LD10				SR4	GM-LSR4
5 MIN				GM-LD05				SR3	
3 MIN				GM-LD03				SR2	
1 MIN				GM-LD01				SR1	

CYLINDER GUARDS TO SUIT SURFACE MOUNTED LOCKING SYSTEMS


GSS2/3/4

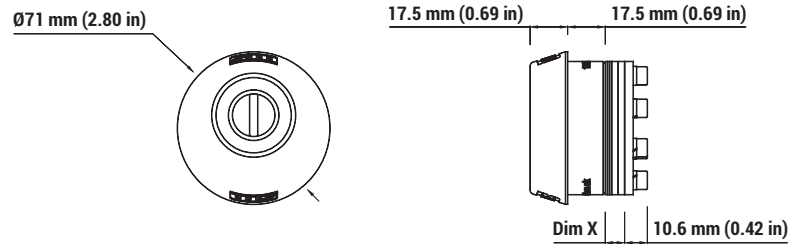

GSS5

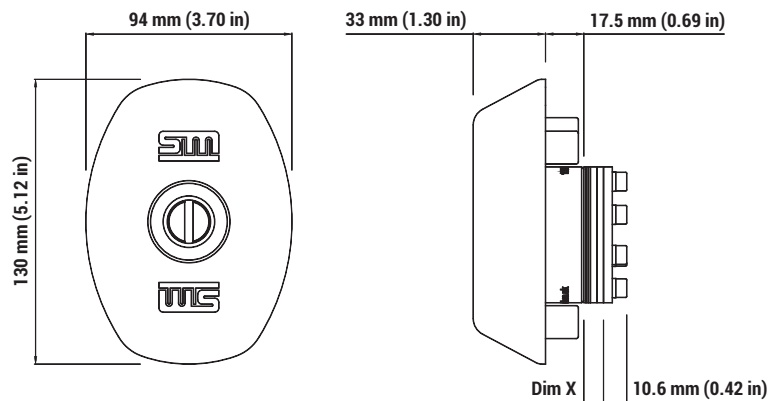


GSS7

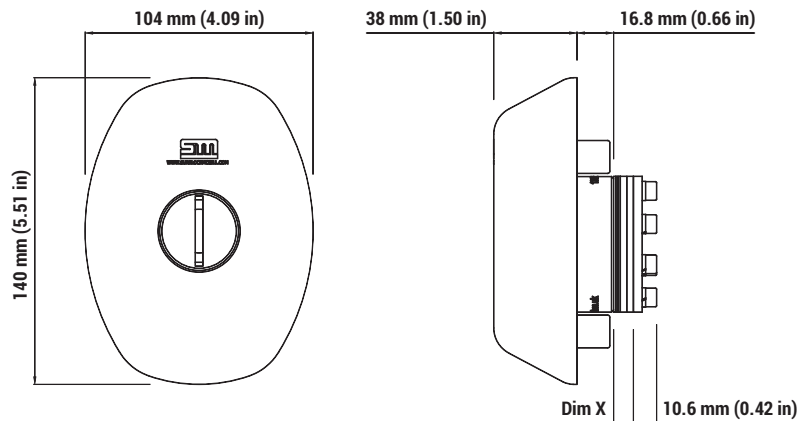

CYLINDER GUARDS TO SUIT MORTICE FITTED LOCKING SYSTEMS

GMS2/3/4

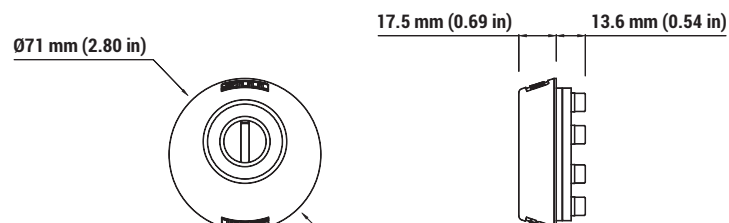

Dim X - dependant on chosen cylinder, please see cylinders assessed to LPS 1175 chart for further information.

CYLINDERS ASSESSED TO LPS 1175

Manufacturer	Model	Cylinder Profile	GMS2/3	GMS4	GSS2/3	GSS4	GSS5	GSS7	Packers (Dim X) (mm)	LPS1175 Plus
Abloy	Disclock Pro CY403-DP	Rim			✓				13	+
Abloy	Disclock Pro CY405-DP	Rim			✓				12	+
Abloy	Disklock Pro CY201-DP	Scandinavian Oval			✓				7	+
Abloy	Disklock Pro CY303-DP, CY304-DP, CY305-DP, CY307-DP, CY308-DP, CY309-DP, CY317-DP, CY318-DP, CY319-DP, CY321-DP, CY322-DP, CY323-DP, CY326-DP, CY327-DP, CY328-DP, CY331-DP, CY332-DP, CY333-DP, CY336-DP, CY337-DP, CY338-DP	Europrofile	✓		✓				0	+
Abloy	Novel CY403-VL	Rim			✓				13	+
Abloy	Novel CY405-VL	Rim			✓				12	+
Abloy	Novel CY201-VL	Scandinavian Oval			✓				7	+
Abloy	Novel CY321-VL, CY322-VL, CY323-VL, CY326-VL, CY327-VL, CY328-VL, CY331-VL, CY332-VL, CY333-VL, CY336-VL, CY337-VL, CY338-VL	Europrofile	✓		✓				0	+
Abloy	Protec CY403-PT	Rim			✓	✓	✓		13	+
Abloy	Protec2 CY403-TT	Rim			✓	✓	✓	✓	13	+
Abloy	Protec Cliq / Cliq Remote CY403-PT-CLIQ	Rim			✓	✓	✓	✓	13	+
Abloy	Protec2 Cliq / Cliq Remote CY403-TT-CLIQ	Rim			✓	✓	✓	✓	13	+
Abloy	Protec CY405-PT	Rim			✓	✓	✓	✓	12	+
Abloy	Protec2 CY405-TT	Rim			✓	✓	✓	✓	12	+
Abloy	Protec CY201-PT	Scandinavian Oval			✓	✓	✓	✓	7	+
Abloy	Protec2 CY201-TT	Scandinavian Oval			✓	✓	✓	✓	7	+
Abloy	Protec Cliq / Cliq Remote CY201-PT-CLIQ	Scandinavian Oval			✓	✓	✓	✓	7	+
Abloy	Protec2 Cliq / Cliq Remote CY201-TT-CLIQ	Scandinavian Oval			✓	✓	✓	✓	7	+
Abloy	Protec CY303-PT, CY304-PT, CY305-PT, CY307-PT, CY308-PT, CY309-PT, CY317-PT, CY318-PT, CY319-PT, CY321-PT, CY322-PT, CY323-PT, CY326-PT, CY327-PT, CY328-PT, CY331-PT, CY332-PT, CY333-PT, CY336-PT, CY337-PT, CY338-PT	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Abloy	Protec Cliq / Cliq Remote CY303-PT-CLIQ, CY304-PT-CLIQ, CY305-PT-CLIQ, CY331-PT-CLIQ, CY332-PT-CLIQ, CY333-PT-CLIQ	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Abloy	Protec2 CY321-TT, CY322-TT, -CY323-TT, CY326-TT, CY327-TT, CY328-TT, CY331-TT, CY332-TT, CY333-TT, CY336-TT, CY337-TT, CY338-TT	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Abloy	Protec2 Cliq / Cliq Remote CY331-TT-CLIQ, CY332-TT-CLIQ, CY333-TT-CLIQ	Europrofile	✓	✓	✓	✓	✓	✓	0	+
ABUS	Vitess 1000	Rim			✓	✓			2	
ABUS	Vitess 1000	Scandinavian Oval			✓	✓			7	
ABUS	Vitess 1000	Europrofile	✓	✓	✓	✓			0	
ABUS	Bravus 2000	Rim			✓	✓	✓		2	
ABUS	Bravus 2000	Scandinavian Oval			✓	✓	✓		7	
ABUS	Bravus 2000	Europrofile	✓	✓	✓	✓	✓		0	
Access2	Tigris Omega	Rim			✓	✓	✓	✓	5	+
Access2	Tigris Omega	Scandinavian Oval			✓	✓	✓	✓	7	+
Access2	Tigris Omega	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Access2	Tigris Plus	Rim			✓	✓			5	
Access2	Tigris Plus	Scandinavian Oval			✓	✓			7	
Access2	Tigris Plus	Europrofile	✓	✓	✓	✓			0	
Access2	Tigris Premier, Premier 2, Premier 3	Rim			✓	✓	✓		5	+
Access2	Tigris Premier, Premier 2, Premier 3	Scandinavian Oval			✓	✓	✓		7	+
Access2	Tigris Premier, Premier 2, Premier 3	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Acsys	BL, SL, DL	Europrofile	✓	✓	✓	✓	✓	✓	0	+
ASSA	4457	Rim			✓	✓	✓		4	+
ASSA	4401, 4407	Scandinavian Oval			✓	✓	✓		7	+
ASSA	4401, 4407 Cliq / Cliq Remote	Scandinavian Oval			✓	✓	✓	✓	7	+
ASSA	4422, 4423, 4427	Europrofile	✓	✓	✓	✓	✓	✓	0	+
ASSA	44M22, 44M23, 44M27 Cliq / Cliq Remote	Europrofile	✓	✓	✓	✓	✓	✓	0	+
ASSA	4857	Rim			✓	✓	✓		4	
ASSA	4801, 4807	Scandinavian Oval			✓	✓	✓		7	

Manufacturer	Model	Cylinder Profile	GMS2/3	GMS4	GSS2/3	GSS4	GSS5	GSS7	Packers (Dim X) (mm)	LPS1175 Plus
ASSA	4822, 4823, 4827	Europrofile	✓	✓	✓	✓	✓	✓	0	
ASSA	C5857	Rim			✓	✓	✓	✓	4	+
ASSA	C5801, C5807	Scandinavian Oval			✓	✓	✓	✓	7	+
ASSA	C5822, C5823, C5827	Europrofile	✓	✓	✓	✓	✓	✓	0	+
ASSA	7657	Rim			✓	✓			4	
ASSA	7601, 7607	Scandinavian Oval			✓	✓			7	
ASSA	7622, 7623, 7627	Europrofile	✓	✓	✓	✓			0	
iLOQ	C105.1	Scandinavian Oval			✓	✓			15	+
iLOQ	S50	Finnish Round	✓						4	+
iLOQ	S50	Europrofile	✓						0	+
Kaba	experT	Scandinavian Oval			✓	✓	✓	✓	6	+
Kaba	experT	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Kaba	Gege pExtra	Scandinavian Oval			✓	✓	✓		7	+
Kaba	Gege pExtra	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Kaba	Gege RAM	Scandinavian Oval			✓	✓	✓	✓	7	+
Kaba	Gege RAM	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Kaba	K20	Rim			✓	✓	✓		0	
Kaba	K20	Scandinavian Oval			✓	✓	✓		6	
Kaba	Quattro Plus	Rim			✓	✓	✓	✓	0	+
Kaba	Quattro Plus	Scandinavian Oval			✓	✓	✓	✓	6	+
Kaba	Quattro Plus	Europrofile	✓	✓	✓	✓	✓	✓	0	+
KESO	4000S	Rim			✓	✓	✓		2	+
KESO	4000S	Scandinavian Oval			✓	✓	✓	✓	7	+
KESO	4000S	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Locken/ISEO	LSSA20A329M	Scandinavian Oval			✓	✓	✓	✓	7	+
Locken/ISEO	LMSA030309M, LMSA830309M, LMSA030109M	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Medeco	M3-ARX	Rim			✓	✓	✓	✓	4	+
Medeco	M3-ARX	Scandinavian Oval			✓	✓	✓	✓	7	+
Medeco	M3-ARX	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Mul-T-Lock	Classic Pro	Rim			✓	✓			4	
Mul-T-Lock	Classic Pro	Scandinavian Oval			✓	✓			7	
Mul-T-Lock	Classic Pro	Europrofile	✓	✓	✓	✓			0	
Mul-T-Lock	Interactive+	Rim			✓	✓			4	
Mul-T-Lock	Interactive+	Scandinavian Oval			✓	✓			7	
Mul-T-Lock	Interactive+	Europrofile	✓	✓	✓	✓			0	
Mul-T-Lock	Intergrator	Rim			✓	✓			4	
Mul-T-Lock	Intergrator	Scandinavian Oval			✓	✓			7	
Mul-T-Lock	Intergrator	Europrofile	✓	✓	✓	✓			0	
Mul-T-Lock	MT5	Rim			✓	✓			4	
Mul-T-Lock	MT5	Scandinavian Oval			✓	✓			7	
Mul-T-Lock	MT5	Europrofile	✓	✓	✓	✓			0	
Mul-T-Lock	MT5+	Rim			✓	✓			4	
Mul-T-Lock	MT5+	Scandinavian Oval			✓	✓			7	
Mul-T-Lock	MT5+	Europrofile	✓	✓	✓	✓			0	
Schlage	MC201	Rim			✓	✓	✓			
Schlage	EC901, EC902, EC903	Europrofile	✓	✓	✓	✓	✓	✓	0	
Surelock McGill	CY-RM	Rim			✓	✓	✓	✓	5	+
Surelock McGill	CY-SN	Scandinavian Oval			✓	✓	✓	✓	7	+
Surelock McGill	CY-ED, CY-ET, CY-ES	Europrofile	✓	✓	✓	✓	✓	✓	0	+
Videx	Cyberlock CL-OVLD	Scandinavian Oval			✓	✓	✓		7	+
Winkhaus	VS6	Rim			✓	✓			2	
Winkhaus	VS6	Scandinavian Oval			✓	✓			7	
Winkhaus	VS6	Europrofile	✓	✓	✓	✓			0	
Yale	X5	Rim			✓	✓			4	

FURTHER ACCREDITATION - CYLINDER GUARD SELECTION CHART

-  - Indicates product has been certified, or tested & approved as part of a complete doorset assembly.
 - Indicates product has passed testing at this attack rating and higher.

TESTING	GSS2/3	GSS4	GSS5	GSS7	GMS2/3	GMS4
FEBR (60 MINS)			GS-FX60			
FEBR (30 MINS)			GS-FX30			
FEBR (15 MINS)		GS-FX15**				
FEBR (05 MINS)		GS-FX05**				
EN-1627 (RC5)				GS-ERC5		
EN-1627 (RC4)	GS-ERC4					
EN-1627 (RC3)	GS-ERC3					
EN-1627 (RC2)	GS-ERC2					
EN-1627 (RC1)	GS-ERC1					
LPS 2081 (B03)	GS-SB03				GM-SB03	
LPS 2081 (A01)	GS-SA01				GM-SA01	
PAS24	GS-PXXX				GM-PXXX	
LPS 1673 (A30-D300)					GM-D300	

** Supplied as a stainless steel housing with 6mm disc

INSTALLATION FIXING DETAIL REFERENCE CHART

FIXING LENGTH	STANDARD CYLINDER FIXING METHOD	OPTION B08 (5 mm (0.2") cylinder guard load plate fixing)	OPTION W14 (Bolt through cylinder guard fixing)
	Referring to thickness of door leaf		
40 mm (1.57")	40 mm (1.57") to 50 mm (1.97")	35 mm (1.38") to 45 mm (1.77")	
50 mm (1.97")	50 mm (1.97") to 60 mm (2.36")	45 mm (1.77") to 55 mm (2.17")	
60 mm (2.36")	60 mm (2.36") to 70 mm (2.76")	55 mm (2.17") to 65 mm (2.56")	
70 mm (2.76")	70 mm (2.76") to 80 mm (3.15")	65 mm (2.56") to 75 mm (2.95")	40 mm (1.57") to 50 mm (1.97")
80 mm (3.15")	80 mm (3.15") to 90 mm (3.54")	75 mm (2.95") to 85 mm (3.35")	50 mm (1.97") to 60 mm (2.36")
90 mm (3.54")	90 mm (3.54") to 100 mm (3.94")	85 mm (3.35") to 95 mm (3.74")	60 mm (2.36") to 70 mm (2.76")
Screw length option W14 subject to change when any packing options are introduced			

SELF CODING SYSTEM

Cylinder Guards have a structured ordering code that covers the chosen style of guard, security accreditation, cylinder profiles as well as fixings to be supplied.

EXAMPLE ORDER CODE: GS-LD05-RR61

PRODUCT NAME		ACCREDITATION		SECURITY RATING (SR/SC)	ATTACK DURATION	CYLINDER PROFILE		FIXINGS		FIXING PLATE	
GS	Surface	L	LPS 1175	SR1 – SR5 (Issue 7)		RR	Round Rim (Standard)	X	No fixings supplied	X	None
GM	Mortice			A – G (Issue 8)	01, 03, 05, 10, 15, 20 Mins	AR	Abloy Rim	4	40 mm (1 1/2")	1	Included
		S	LPS 2081	A01 or B03		SI	Mortice (Screw-in)	5	50 mm (2")		
		E	EN 1627	RC1 – RC6		SO	Scan Oval	6	60 mm (2 3/8")		
		F	FEBR	X	05, 15, 30, 60 Mins	EU	Euro-profile	7	70 mm (2 3/4")		
		P	PAS 24	XXX				8	80 mm (3 1/4")		
		N	NPSA	A01/C01/D01				9	90 mm (3 1/2")		
		D	LPS 1673	300 Secs							